

ProMeister



User Guide

6 Pcs 3/8" Dr Bolt Extractor Set

Art. Nr: PT5805

Produced in Taiwan for Bileko

Bileko P.O. Box 542

S-645 25 Strängnäs, Sweden


Tel: +46 771 72 00 00 | www.promeister.com

RVNR-01

Features

- 2mm, 3mm, 4mm, 6mm, 8mm, 10mm
- Set for removing worn or rusty inner hex bolt by drilling a hole
- Tool with 3/8" Dr to work with a ratchet wrench for additional torque
- Product NOT designed for air/impact wrench operation

Specifications

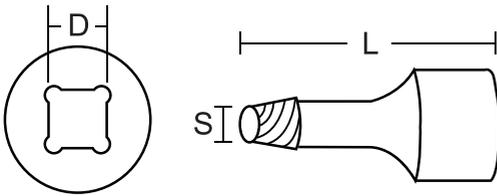

Square Drive (D)	3/8" Dr		
Size (S) (mm)	2	3	4
	6	8	10
Length (L) (mm)	60		
Material	8660 Steel		
Surface Treatment	Zinc Phosphate		
Hardness	HRC 49-52		

Instructions



- Always read the instructions carefully before using the tool
- DO NOT use an air/impact wrench to work with the tool
- Ensure the working area has adequate lighting
- Keep children and unauthorized persons away from the working area
- Keep working area clean and tidy, dry and free from unrelated materials
- DO NOT allow untrained persons to use this tool kit
- Always wear eye protection that meets OSHA and ANSI Z87.1 standards
- Always wear gloves when working with the tool
- Always wear ear protection
- Disposal: Customers should follow local regulations to handle used/wasted parts

1. Choose a suitable sized bolt extractor, and drill a hole 0.5mm bigger than the bolt extractor (Fig. 1).
2. Remove the drill.
3. Insert the bolt extractor (Fig. 2).
4. Turn the extractor anti-clockwise to remove the screw/bolt (Fig. 3).

